
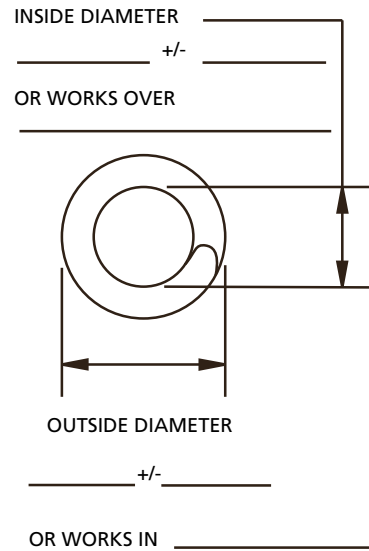
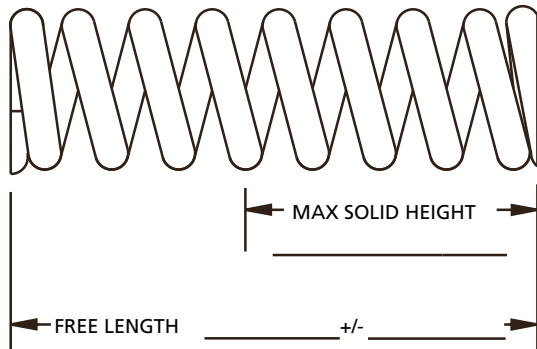


COMPRESSION SPRINGS SPECIFICATION FORM

Compression springs are generally specified to work in a bore or over a rod. They can be supplied with end coils closed and ground square for optimum alignment and reduced solid height. Springs can also be pre-stressed during manufacture to maintain length at elevated stress levels.

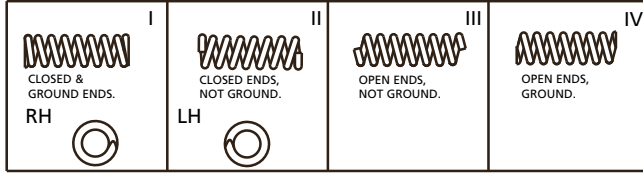

INDICATE UNITS OF MEASURE (IN & LB), (MM & N)

- 1. MATERIAL _____
- 2. WIRE DIA. _____
- 3. DIRECTION OF WIND OPT LH RH
- 4. STYLE OF END I II III IV
- 5. SQUARENESS _____
- 6. RATE _____ +/- _____ BETWEEN _____ & _____
- 7. LOAD 1 _____ +/- _____ @ _____
- 8. LOAD 2 _____ +/- _____ @ _____
- 9. No. OF ACTIVE COILS _____
- 10. TOTAL No. OF COILS _____
- 11. FINISH _____
- 12. FREQUENCY OF COMPRESSION _____ CYCLES/SEC
- AND WORKING RANGE _____ IN. TO _____ IN. OF LENGTH
- 13. OPERATING TEMP _____ °c
- 14. OTHER _____

QUANTITY TO QUOTE FOR _____

CUSTOMER NAME:	A/C No:	ENQUIRY TAKEN BY:
		DATE TO SUPPLIER:
CUSTOMER CONTACT		DATE PRICE RECEIVED:
TEL No:	EMAIL:	