




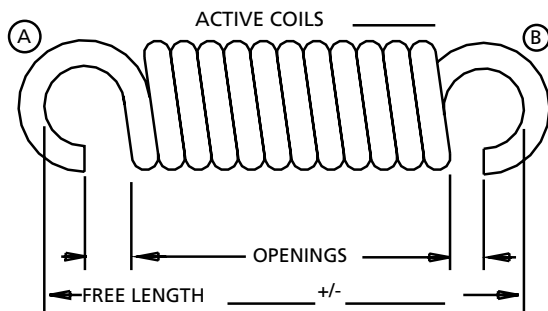


# EXTENSION SPRINGS SPECIFICATION FORM

Extension springs feature a close wound body with loops on both ends to facilitate attachment. They are supplied wound with initial tension that can be varied within a limited range to achieve different loading characteristics. Other features such as loop diameter, opening and relative position can be modified to ensure a proper fit.

END STYLE	I MACHINE LOOPS	II CROSSOVER	III SIDE LOOPS	IV EXTENDED HOOKS
LOOP TYPE				
RECOMMENDED LOOP LENGTH.				
MIN	1/2 I.D.	I.D.	I.D.	1.1 x I.D.
MAX	1.1 x I.D.	I.D.	I.D.	AS REQUIRED

LOOP/HOOK (A) LENGTH \_\_\_\_\_ +/- \_\_\_\_\_ OPENING \_\_\_\_\_ +/- \_\_\_\_\_  
 LOOP/HOOK (B) LENGTH \_\_\_\_\_ +/- \_\_\_\_\_ OPENING \_\_\_\_\_ +/- \_\_\_\_\_



INDICATE UNITS OF MEASURE (IN & LB), (MM & N)

1. MATERIAL \_\_\_\_\_
2. WIRE DIA. \_\_\_\_\_
3. DIRECTION OF WIND     OPT   LH   RH
4. END STYLE (A) I II III IV   (B) I II III IV   (SEE ABOVE)
5. INITIAL TENSION \_\_\_\_\_ +/- \_\_\_\_\_
6. RATE \_\_\_\_\_ +/- \_\_\_\_\_ BETWEEN \_\_\_\_\_ & \_\_\_\_\_
7. LOAD 1 \_\_\_\_\_ +/- \_\_\_\_\_ @ \_\_\_\_\_
8. LOAD 2 \_\_\_\_\_ +/- \_\_\_\_\_ @ \_\_\_\_\_

9. MAXIMUM EXTENDED LENGTH (INSIDE ENDS) WITHOUT SET \_\_\_\_\_
10. RELATIVE LOOP POSITION \_\_\_\_\_ RANDOM OR \_\_\_\_\_ ALIGNED  
 AT \_\_\_\_\_ DEGREES +/- \_\_\_\_\_ DEGREES
11. FINISH \_\_\_\_\_
12. FREQUENCY OF EXTENSION \_\_\_\_\_ CYCLES/SEC  
 AND WORKING RANGE \_\_\_\_\_ LENGTH 1 TO \_\_\_\_\_ LENGTH 2
13. OPERATING TEMP \_\_\_\_\_ °F/ °C
14. OTHER \_\_\_\_\_

QUANTITY TO QUOTE FOR \_\_\_\_\_

CUSTOMER NAME:	A/C No:	ENQUIRY TAKEN BY:
		DATE TO SUPPLIER:
CUSTOMER CONTACT		DATE PRICE RECEIVED:
TEL No:	EMAIL:	